

고압 호스 1W

내면 고무 : 내유성, 내수성 합성고무

보강층 : 고 장력 강선 (1회 편조)

외면고무 : 내유성, 내후성 및 내마모성 합성고무

용도 : 광물성, 난연성 및 수성계 작동유, 탄화수소계 합성 윤활유라인

사용 온도 범위 : -40℃ ~ +100℃ (-40℉ ~ + 212℉)

공기에 사용할때는 외면 고무에 PIN PRICKING한것을 사용하여 주십시오.

												
품목코드	규격	Hose I.D.		Hose O.D.		Max operating		Min burst		Min bend Radius		Weight
		inch	mm	inch	mm	kg/cm ²	psi	kg/cm ²	psi	inch	mm	kg/m
HSHP-041W-193	1/4*1W	1/4	6.4	0.52	13.2	210	3,000	840	12,000	4.0	102	0.22
HSHP-051W-176	5/16*1W	5/16	7.9	0.59	15.0	176	2,500	705	10,000	4.5	114	0.28
HSHP-061W-158	3/8*1W	3/8	9.5	0.67	17.1	158	2,250	635	9,000	5.0	127	0.30
HSHP-081W-140	1/2*1W	1/2	12.7	0.80	20.3	140	2,000	562	8,000	7.0	178	0.39
HSHP-101W-105	5/8*1W	5/8	15.9	0.94	23.8	105	1,500	420	6,000	8.0	203	0.50
HSHP-121W-090	3/4*1W	3/4	19.0	1.07	27.2	90	1,250	360	5,000	9.5	241	0.64
HSHP-161W-070	1*1W	1	25.4	1.40	35.5	70	1,000	280	4,000	12.0	305	0.83
HSHP-201W-044	1 1/4*1W	1 1/4	31.8	1.71	43.4	44	625	180	2,500	16.5	419	1.20
HSHP-241W-035	1 1/2*1W	1 1/2	38.1	1.95	49.5	35	500	140	2,000	20.0	508	1.50
HSHP-321W-026	2*1W	2	50.8	2.45	62.2	26	375	105	1,500	25.0	635	1.95

고압 호스 2W

내면 고무 : 내유성, 내수성 합성고무


보강층 : 고 장력 강선 (2회 편조)

외면고무 : 내유성, 내후성 및 내마모성 합성고무

용도 : 광물성, 난연성 및 수성계 작동유, 탄화수소계 합성 윤활유라인

사용 온도 범위 : -40℃ ~ +100℃ (-40℉ ~ + 212℉)

공기에 사용할때는 외면 고무에 PIN PRICKING한것을 사용하여 주십시오.

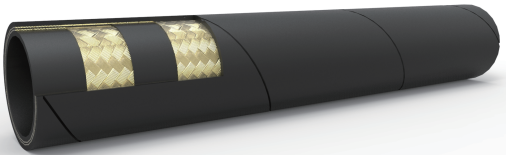

												
품목코드	규격	Hose I.D.		Hose O.D.		Max operating		Min burst		Min bend Radius		Weight
		inch	mm	inch	mm	kg/cm ²	psi	kg/cm ²	psi	inch	mm	kg/m
HSHP-042W-350	1/4*2W	1/4	6.4	0.57	14.6	350	5,000	1,400	20,000	4.00	100	0.34
HSHP-052W-300	5/16*2W	5/16	7.9	0.66	16.7	300	4,250	1,200	17,000	4.50	114	0.40
HSHP-062W-280	3/8*2W	3/8	9.5	0.74	18.7	280	4,000	1,120	16,000	5.00	127	0.45
HSHP-082W-245	1/2*2W	1/2	12.7	0.87	22.0	245	3,500	980	14,000	7.00	178	0.62
HSHP-102W-190	5/8*2W	5/8	15.9	1.00	25.3	190	2,750	760	11,000	8.00	203	0.74
HSHP-122W-160	3/4*2W	3/4	19.0	1.14	29.0	160	2,250	640	9,000	9.48	240	0.90
HSHP-162W-140	1*2W	1	25.4	1.46	37.0	140	2,000	560	8,000	12.00	305	1.22
HSHP-202W-114	1 1/4*2W	1 1/4	31.8	1.78	45.2	115	1,630	460	6,520	16.50	420	1.72
HSHP-242W-088	1 1/2*2W	1 1/2	38.1	2.03	51.5	88	1,250	352	5,035	20.00	508	2.10
HSHP-322W-075	2*2W	2	50.8	2.52	64.0	75	1,125	300	4,500	25.00	635	2.60