



동양 호스 1W

내면 고무 : 내유성, 내수성 합성고무

보강층 : 고 장력 강선 (1회 편조)


외면고무 : 내유성, 내후성 및 내마모성 합성고무

용도 : 광물성, 난연성 및 수성계 작동유, 탄화수소계 합성 윤활유라인

사용 온도 범위 : -40℃ ~ +100℃ (-40°F ~ + 212°F)

공기에 사용할때는 외면 고무에 PIN PRICKING한것을 사용하여 주십시오.

												
품목코드	규격	Hose I.D.		Hose O.D.		Max operating		Min burst		Min bend Radius		Weight
		inch	mm	inch	mm	Mpa	psi	Mpa	psi	inch	mm	kg/m
HZSHP-041W-225	1/4*1W	1/4	6.3	0.55	14.1	22.5	3,260	90.0	13,050	3.94	100	0.23
HZSHP-061W-180	3/8*1W	3/8	10.0	0.71	18.1	18.0	2,610	72.0	10,440	4.92	125	0.34
HZSHP-081W-160	1/2*1W	1/2	12.5	0.84	21.4	16.0	2,320	64.0	9,280	7.08	180	0.43
HZSHP-121W-105	3/4*1W	3/4	19.0	1.12	28.5	10.5	1,520	42.0	6,090	9.45	240	0.66
HZSHP-161W-88	1*1W	1	25.0	1.44	36.6	8.7	1,280	35.0	5,080	11.81	300	1.00
HZHP-201W-63	1 1/4*1W	1 1/4	31.5	1.76	44.8	6.3	910	25.0	3,680	16.53	420	1.35
HZHP-241W-50	1 1/2*1W	1 1/2	38.0	1.44	52.1	5.0	720	20.0	2,900	19.68	500	1.56
HZHP-321W-40	2*1W	2	51.0	2.58	65.5	4.0	580	16.0	2,320	24.80	630	2.20

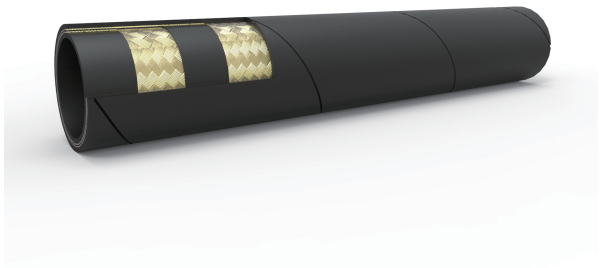

동양 호스 2W

내면 고무 : 내유성, 내수성 합성고무

보강층 : 고 장력 강선 (2회 편조)

외면고무 : 내유성, 내후성 및 내마모성 합성고무

용도 : 광물성, 난연성 및 수성계 작동유, 탄화수소계 합성 윤활유라인

사용 온도 범위 : -40℃ ~ +100℃ (-40°F ~ + 212°F)

공기에 사용할때는 외면 고무에 PIN PRICKING한것을 사용하여 주십시오.

												
품목코드	규격	Hose I.D.		Hose O.D.		Max operating		Min burst		Min bend Radius		Weight
		inch	mm	inch	mm	Mpa	psi	Mpa	psi	inch	mm	kg/m
HZSHP-042W-400	1/4*2W	1/4	6.3	0.62	15.7	40.0	5,801	160.0	23,204	3.94	100	0.34
HZSHP-052W-350	5/16*2W	5/16	8.0	0.68	17.3	35.0	5,076	140.0	20,304	4.53	115	0.39
HZSHP-062W-330	3/8*2W	3/8	10.0	0.77	19.7	33.0	4,786	132.0	19,144	5.12	130	0.49
HZSHP-082W-275	1/2*2W	1/2	12.5	0.91	23.0	27.5	3,989	110.0	15,956	7.08	180	0.59
HZSHP-122W-215	3/4*2W	3/4	19.0	1.18	30.1	21.5	3,118	86.0	12,472	9.45	240	0.89
HZSHP-162W-165	1*2W	1	25.0	1.53	38.9	16.5	2,393	65.0	9,430	11.81	300	1.37
HZHP-202W-125	1 1/4*2W	1 1/4	31.5	1.94	49.5	12.5	1,813	50.0	7,252	16.53	420	2.27
HZHP-242W-90	1 1/2*2W	1 1/2	38.0	2.20	55.9	9.0	1,305	36.0	5,220	19.68	500	2.44
HZHP-322W-80	2*2W	2	51.0	2.70	68.6	8.0	1,160	32.0	4,640	24.80	630	3.00